



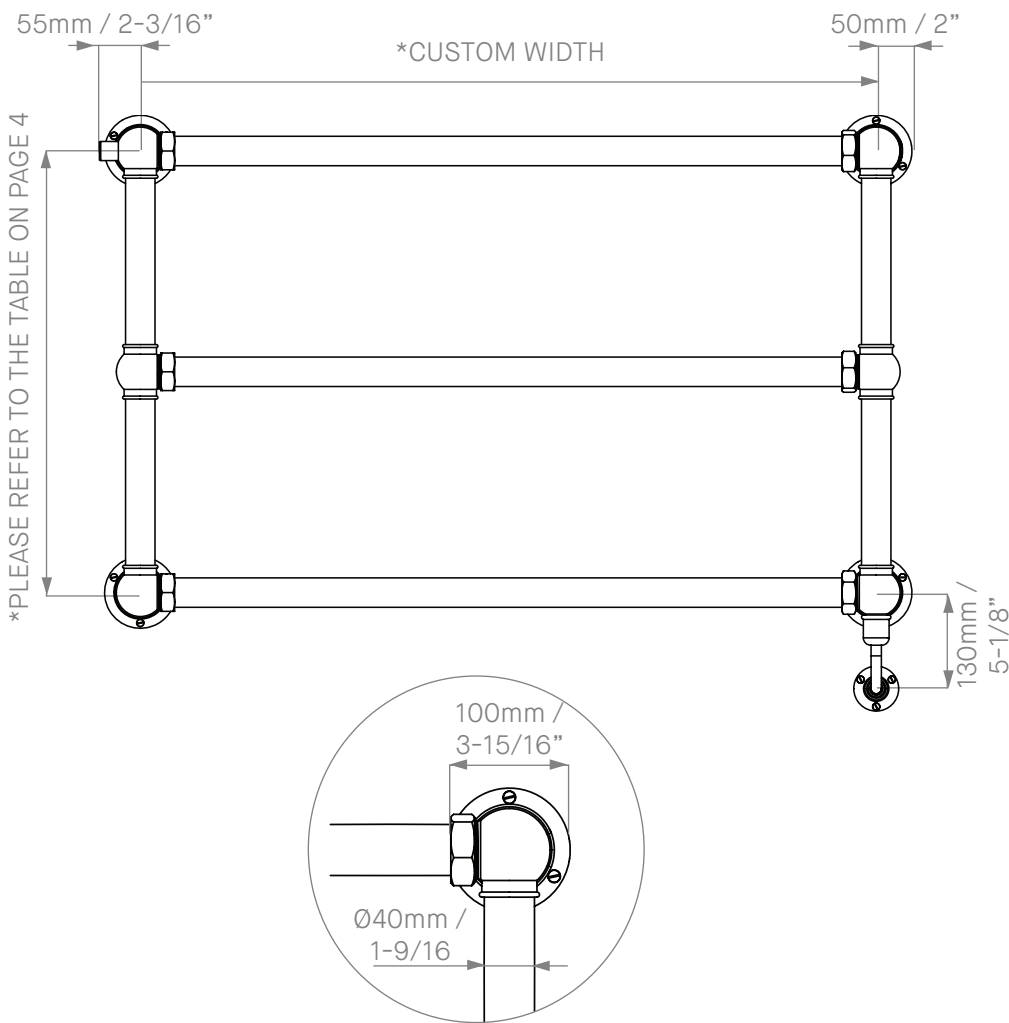

CABLE COVERS

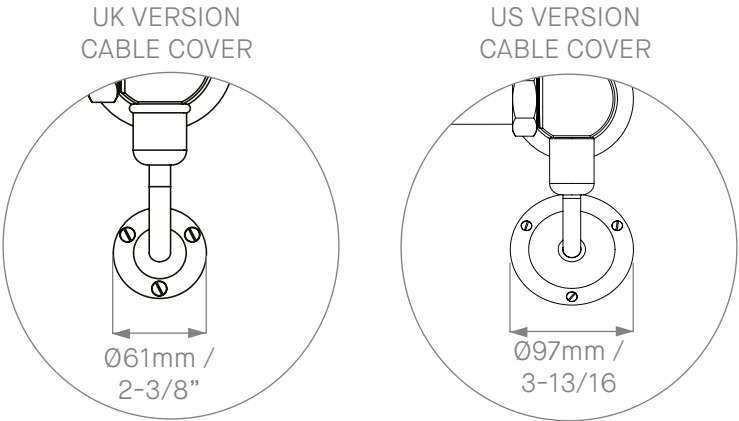

* For the height and custom width dimensions, please refer to your completed customisation form.

IMPORTANT

- Please remove towel rails from their wooden crate prior to storage.
- Storage must be in a clean, dry environment at normal room temperature.
- Remove dust, dirt or moisture build up during the storage period to avoid tarnishing.

Heating Element Supplied (IP55)


US: 110V approx. 1300mm / 51-3/16"

UK: 230V approx. 1000mm / 39-3/8"

DEPTH ADJUSTMENT TOLERANCE

DAD1804ME, DAD1805ME, DAD1806ME, DAD1807ME DAD1808ME

Figure 1

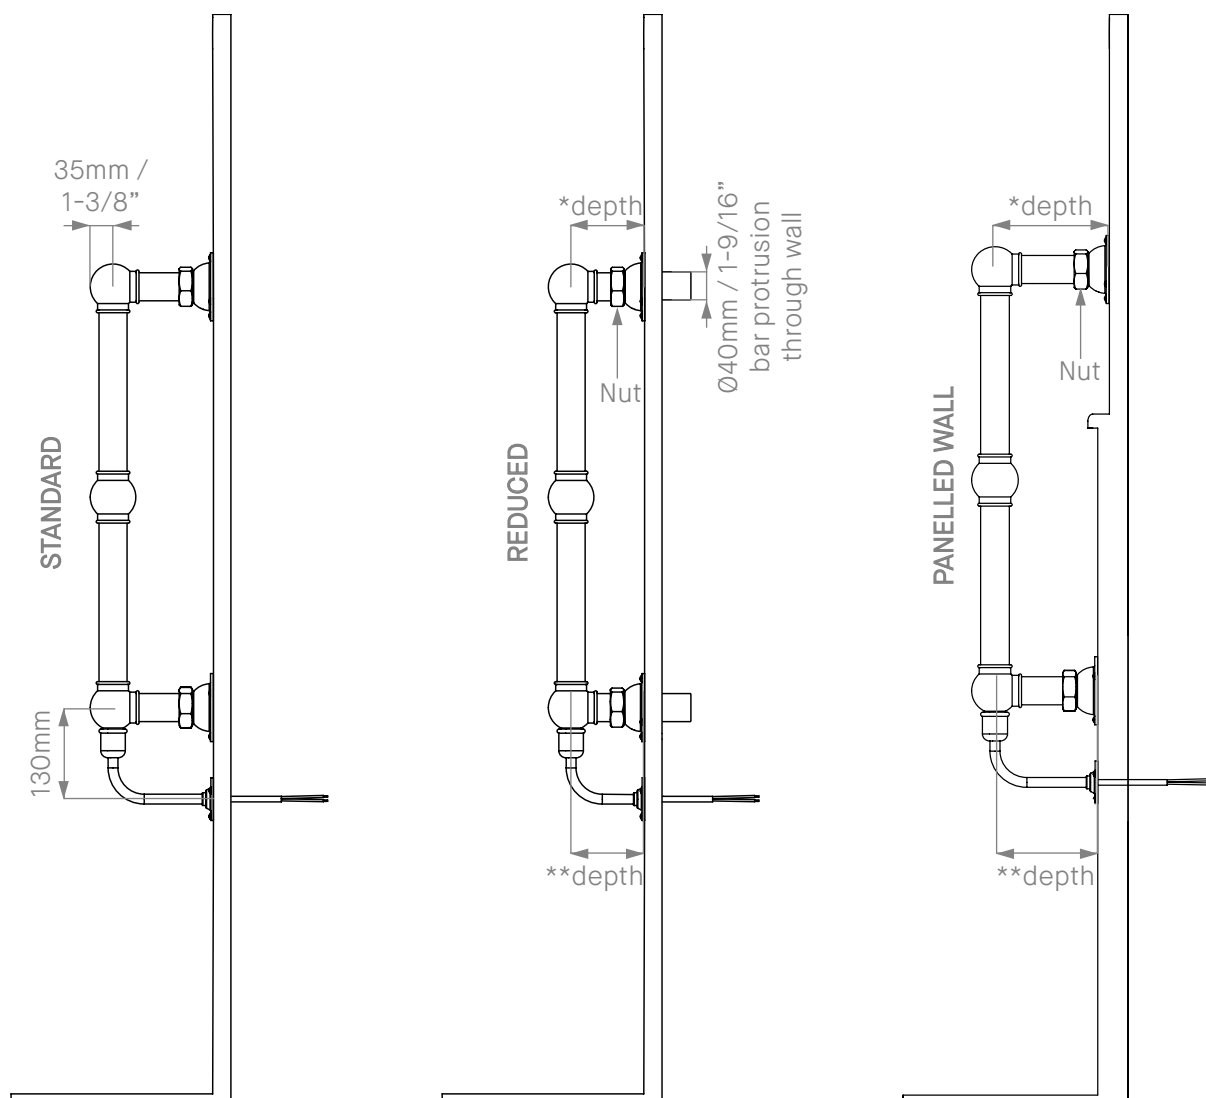

* Min tolerance: 105mm / 4-1/8"
Max tolerance: 170mm / 6-11/16"

** Min tolerance: 105mm / 4-1/8"
Max tolerance: 143mm / 5-5/8"

Please Note: The towel rail will be set at
143mm / 5-5/8"
(wall to centre)

To achieve an adjusted depth towards the min tolerance, please allow for 40mm / 1-9/16" diameter wall recesses. This is required to accommodate the horizontal bar to protrude into wall as nut is adjusted.

TAKING DELIVERY OF YOUR PRODUCTS

- Sign for delivery confirming the number of pallets/boxes received.
- Open boxes and crates checking that all components are included, in accordance with product drawing and delivery note.
- Check for any damage to the products that may have occurred during transportation. If there is any visible sign of damage to the crate/shipping packaging, please follow these steps:
 - I. Sign for the goods as damaged
 - II. Take pictures of the goods/damage whilst on the delivery vehicle and after unloading.
 - III. Please keep all packaging intact as this may be required for part of the claims process.
- In accordance with our terms and conditions, report in writing, any damage, or missing products within 3 working days of delivery.

PROTECTING YOUR PRODUCTS ON SITE

- Towel rails should be removed from their wooden crate and stored in a clean, dry environment at normal room temperature. It is very important that the plated surface of the towel rail is kept clean and dry.
- Any dust, dirt or moisture allowed to accumulate on the plated surface will result in tarnishing, which can permanently damage the product, invalidating the guarantee.
- Please follow the care instructions if you need to clean the products being careful not to use any abrasive or chemical cleaners.

PREPARING FOR INSTALLATION


- All water fittings should be installed by a qualified plumbing engineer and comply with the current water regulations. Products and connections should remain accessible for routine maintenance. We recommend that isolation and non-return valves are fitted in all installations where appropriate.
- Please read and follow the installation instructions carefully for each product and check that you have all the components and tools required to carry out correct installation.
- Take all necessary precautions to ensure that all parts are properly protected during and after installation.
- Polished and plated surfaces are particularly prone to damage from dirty and incorrect tools; spanners should be suitably lined to prevent damage to plated surfaces.
- After installation, please ensure that the product is operating correctly and is clean (in accordance with the Care & Maintenance instructions) and protected until completion of all works in the property.

TECHNICAL INFORMATION

- Drummonds Electric Heated Towel Rails have been tested to European Standards EN 60335-2-43.
- Switches and temperature controls are not supplied by Drummonds, please discuss your requirements with your electrician.
- Heating elements supplied are IP55
- UK Version Heating elements are supplied at 230V and are approx. 1000mm / 39-3/8" cable length.
- US Version Heating elements are supplied at 110V and are approx. 1300mm / 51-3/16" cable length.
- Please note heating elements are subject to change
- Maximum temperature range is 55-62°C (131-144°F).


Wall Mounted Heated Towel Rails:

Number of Bars	Product Code	Height (a) mm	Example Custom Width (b) mm	Depth (c) mm	BTU/hr
2	DAD1808ME	300	550	Standard depth 143mm	
2		300	1000		
3	DAD1804ME	600	550	*Min Tolerance 105mm	511
3		600	1000		682
4	DAD1805ME	1000	550	Top Max Tolerance 170mm	682
4		1000	1000		1023
5	DAD1806ME	1300	550	Bottom Max Tolerance 143mm	682
5		1300	1000		1023
6	DAD1807ME	1600	550		1023
6		1600	1000		1364


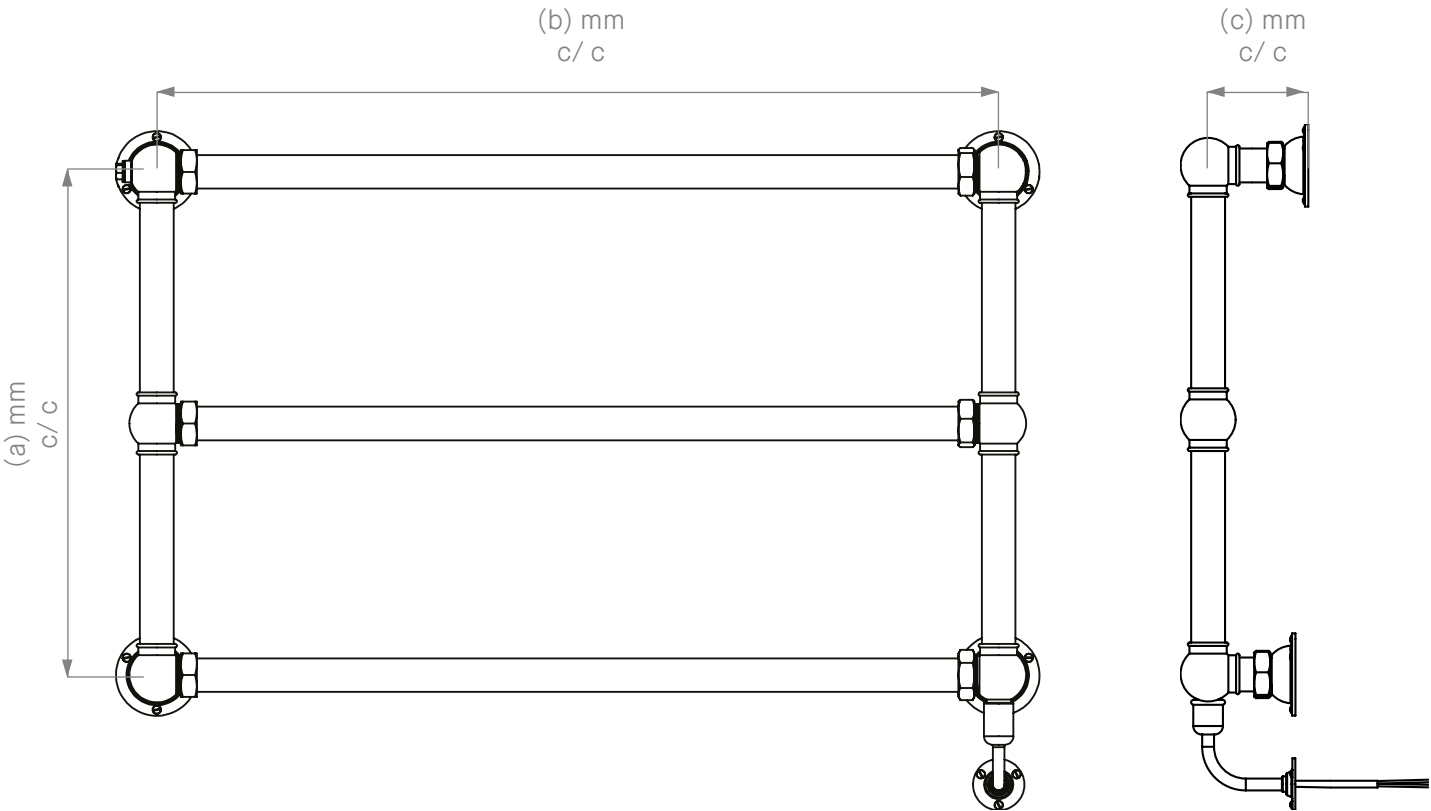


SAFETY GUIDANCE NOTES

- This product must be installed by a qualified professional, in accordance with the relevant standards and regulations applicable in your country.
- This product is not intended for use by young children or infirm persons without appropriate supervision.
 - DO NOT use the towel rail to hang articles that have been cleaned with dry cleaning fluids.
- DO NOT hang items on the towel rail that have been in contact with oil or petroleum based products.
 - DO NOT immerse the towel in any liquid.
- Ensure that installation is carried out strictly in accordance with these instructions.

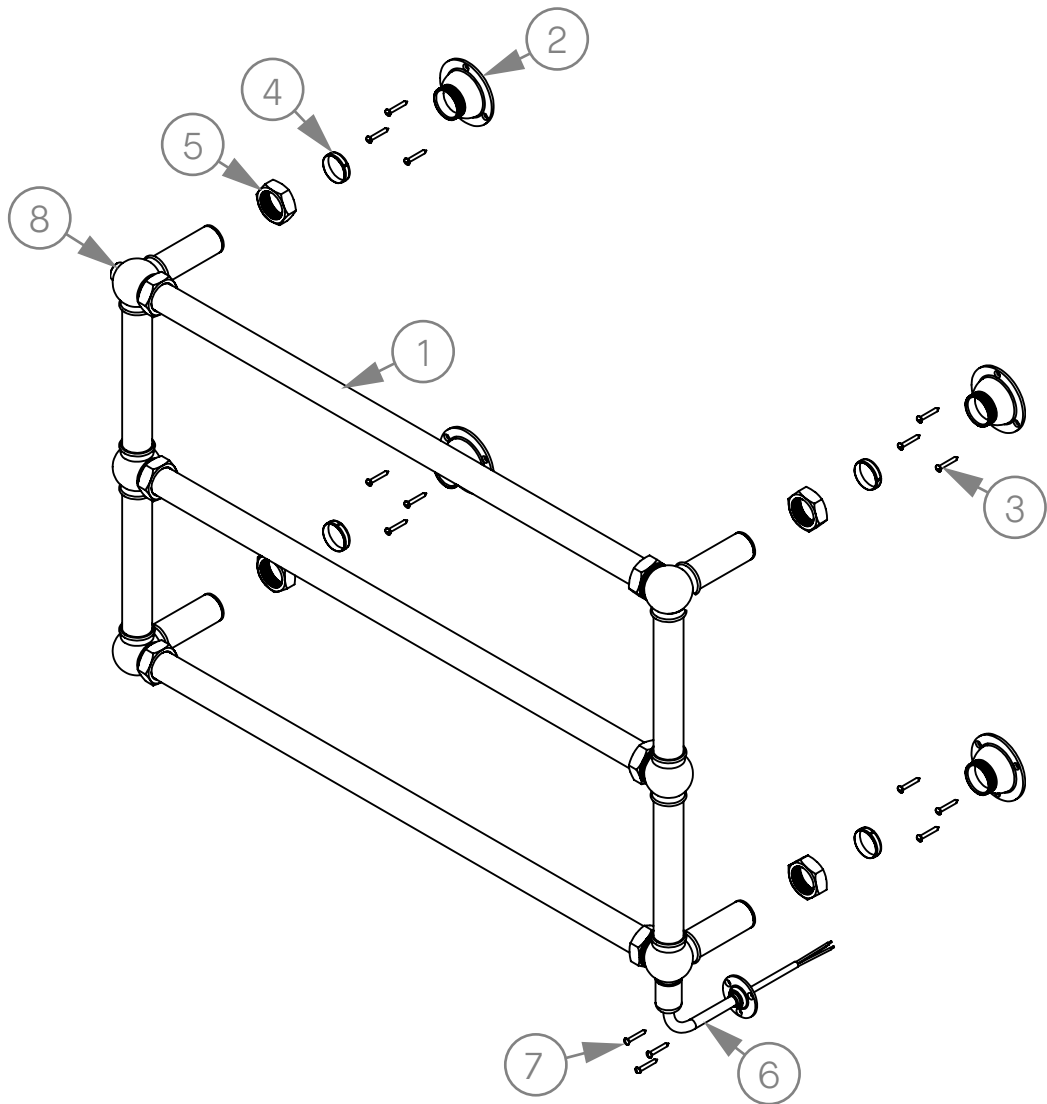


#	COMPONENT	QTY
1	Towel Rail	1
2	Escutcheon	4
3	Screw 10 x 1-1/2" (DAF111)	12
4	Olive	4
5	Nut	4
6	Cable Cover	1
7	Screw 6 x 1" (DAD107)	3
8	3 Bar Pressure Release Valve	1

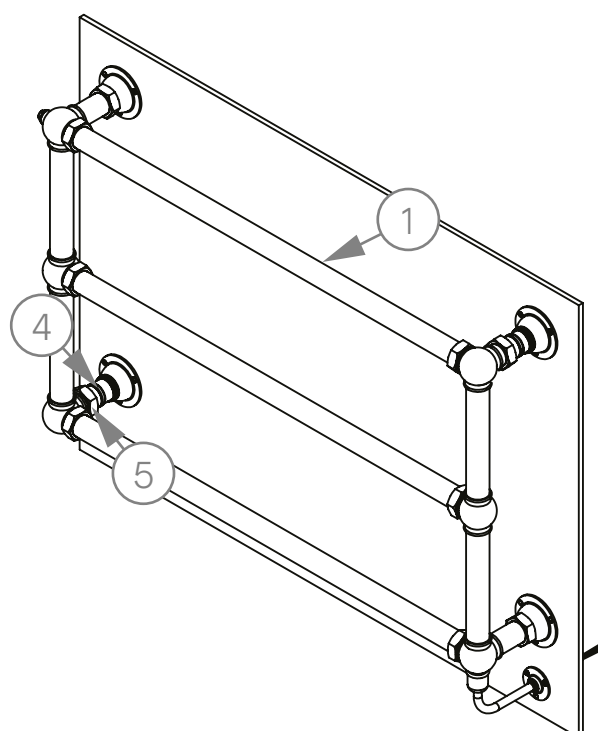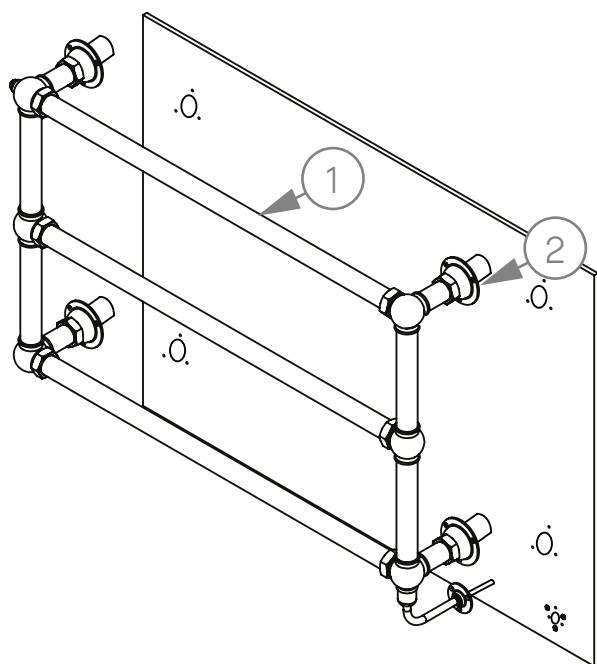

1. Carefully unpack the towel rail (1) being careful not to damage the polished surfaces. Determine where towel rail (1) will be installed and the depth required. Please note, 40mm diameter holes will be required in the wall to accommodate the horizontal bars towards min depth adjustment. Mark drilling points through the escutcheons (2). DO NOT drill directly through the escutcheon.

2. Connect the towel rail (1) to your electrical supply prepared in compliance with the 'Preperation for Installation' section on page 2. To level the towel rail (1), loosen nut and compression olive (4 and 5) to align and re-tighten.

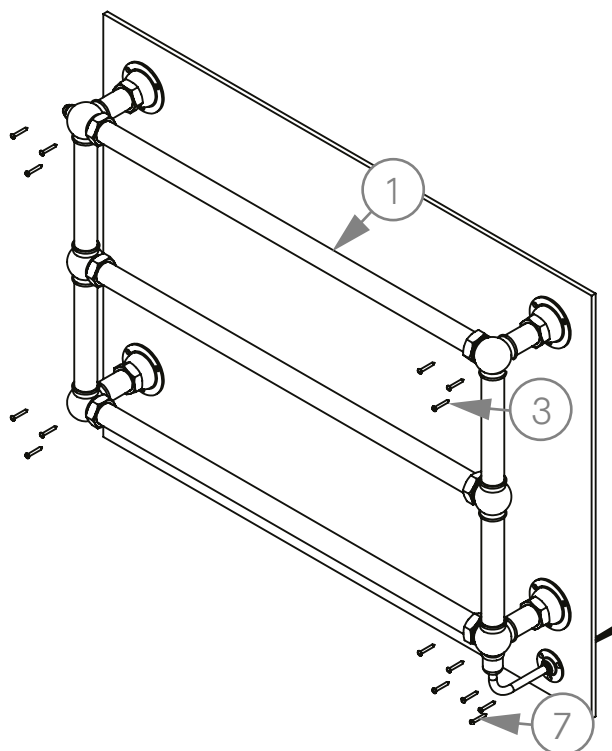

3. Fix towel rail (1) to the wall using screws (5 and 7). Test and check for leaks.

CARE AND MAINTENANCE

A Drummonds' Bathroom product is designed to give you years of faultless service and, if you follow the instructions below, will continue to look stunning for many years to come. All of Drummonds' Bathroom products are guaranteed for 1 year from the date of purchase against manufacturing defects. The guarantee does not cover faults caused by incorrect installation, neglect, misuse, wear & tear, inappropriate cleaning, or damage caused by the build-up of limescale. Please see Drummonds' T&Cs for further details of the product guarantee.

GENERAL USE

To help prevent limescale build up and water marks, all surfaces should be wiped dry after use. Only mild, nonabrasive cleaning products should be used followed by rinsing and drying with a soft cloth.

POLISHED BRASS PRODUCTS

All of Drummonds taps and fittings are made from 100% brass, which can be supplied in a polished finish that is not lacquered. Polished brass will tarnish very quickly, especially in the bathroom where it is exposed to moisture. If you wish to maintain a shiny brass finish, regular polishing with an appropriate metal polish such as Brasso will be required.

POLISHED CHROME AND NICKEL PRODUCTS

Wipe off any water marks after use with a soft cloth or towel. Clean on a regular basis with a mild non-abrasive bathroom cleaner, again taking care to dry the product with a soft cloth or towel. For stubborn stains, particularly in hard water areas, remove with Brasso. Nickel products will require periodic polishing with Brasso, otherwise they will develop an aged patina like silverware.

SHOWER HEADS AND ROSES

Clean and descale on a regular basis, paying particular attention to the holes in the shower head to ensure that they do not become blocked. Remove and clean the thermostatic cartridge on a periodic basis to prevent permanent damage from limescale.

CAST IRON BATHS AND SHOWER TRAYS

The interior of a Drummonds bath or shower tray is enamelled with dry frit vitreous enamel which is very hard wearing and durable. To maintain the soft shine on the surface of the enamel rinse the bath out after each use, making sure that you get rid of any gritty deposits. and then dry it with a soft cloth or towel. To remove marks or dirt use a non-abrasive bathroom cleaner which is safe for use on enamelled surfaces (please see the Vitreous Enamel Association website for guidance on suitable cleaners www.vea.org.uk). It is very important to ensure that a dripping, or leaking, tap is repaired immediately to prevent the enamel being permanently damaged.

BATH EXTERIOR

Caring for the exterior of your bath or shower tray is dependent on the finish of your bath:

- A raw, primed, or painted exterior does not require any maintenance, other than occasional cleaning to maintain the appearance. If the exterior becomes scratched, exposing the cast iron below, it must be treated immediately with a suitable rust inhibitor, followed by a metal primer and paint finish to seal the exterior.
- A polished or lacquered exterior is a beautiful finish, but it must be treated very carefully to avoid scratching especially when moving the bath into position. If the exterior does become scratched, please call Drummonds immediately so that we can advise on the best course of action. In general use, the polished exterior should simply be wiped down with a soft clean cloth. Never use any kind of bathroom cleaner on the exterior of your bath. Care should also be taken when cleaning the floor around the bath, particularly with a skirted bath, not to allow floor cleaner to splash or rub on the bath, as it may damage the lacquer which protects the bath from rusting.

CHINA SANITARYWARE

Clean on a regular basis with a mild, non-abrasive bathroom cleaner to prevent the buildup of dirt and limescale. Ensure that dripping taps are repaired quickly to avoid the surface of the China becoming stained.

MARBLE VANITY BASINS

A Drummonds' marble vanity basin is a natural product which is hand polished and sealed in the factory. Clean the surface of the marble after use with a soft cloth, making sure that you dry the surface to prevent watermarks from developing on the marble. We would recommend Lithofin Easy Care which is a daily cleaner/conditioner designed for natural stones. Under no circumstances use any kind of bathroom cleaner or limescale remover on the surface of the marble. To prevent staining, it is important to ensure that any cosmetics, including shampoo, are wiped off the surface immediately.

WOODEN LOO SEATS

Clean after use with a damp soft (non-abrasive) cloth and dry immediately. Never use a bathroom cleaner on your loo seat as this is likely to strip off the varnish invalidating the guarantee. Use a high-quality furniture wax polish occasionally such as Mylands Wax - Natural and apply in accordance with the manufacturers' instructions. Under no circumstance stand on your loo seat. Replace bumpers when perished as these can mark and stain the toilet seat.